

BG 25/30
BG 35/50
BG 35/100

TS 25/30
TS 35/50
TS 35/100



BG 25/30
BG 35/50
BG 35/100

BELICHTUNGSGERÄT
EXPOSURE UNIT

TS 25/30
TS 35/50
TS 35/100

TROCKNUNGSSCHRANK
DRYING CABINET


 **Teca-Print**
 **Teca-Print**

| TECHNISCHE DATEN | BG 25/30 | BG 35/50 | BG 35/100 |
|--|----------------------------------|----------------------------------|-----------------|
| 1. Abmessungen (Breite x Höhe x Tiefe): | 520x200x460 | 760x180x550 | 1370x200x625 |
| 2. Klischeegrösse (in mm): | max. 370 x 230 | max. 620 x 270 | max. 1100 x 350 |
| 3. Belichtungsfläche (in mm): | max. 350 x 220 | max. 550 x 230 | max. 1050 x 320 |
| 4. Elektrischer Anschluss (Spezialvers. in Klammern): | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz |
| 5. Anschlussleistung: | 200 W | 360 W | 700 W |
| 6. UV-Röhren | 4 x 15 W | 6 x 20 W | 8 x 36 W |
| 7. Vakuumpumpe: | eingebaut | eingebaut | eingebaut |
| 8. Gewicht (ca.): | 22 kg | 34 kg | 45 kg |


| TECHNICAL DATA | BG 25/30 | BG 35/50 | BG 35/100 |
|---|----------------------------------|----------------------------------|-----------------|
| 1. Dimensions (width x height x depth): | 520x200x460 | 760x180x550 | 1370x200x625 |
| 2. Plate size (in mm): | max. 370 x 230 | max. 620 x 270 | max. 1100 x 350 |
| 3. Exposure area (in mm): | max. 350 x 220 | max. 550 x 230 | max. 1050 x 320 |
| 4. Electric supply: (Special vers. in brackets): | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz |
| 5. Power rating: | 200 W | 360 W | 700 W |
| 6. UV tubes: | 4 x 15 W | 6 x 20 W | 8 x 36 W |
| 7. Vacuum pump: | inbuilt | inbuilt | inbuilt |
| 8. Weight (approx.): | 22 kg | 34 kg | 45 kg |

| TECHNISCHE DATEN | TS 25/30 | TS 35/50 | TS 35/100 |
|---|----------------------------------|----------------------------------|-----------------|
| 1. Abmessungen (Breite x Höhe x Tiefe): | 520x200x460 | 760x180x550 | 1370x193x625 |
| 2. Klischeegrösse: | max. 350 x 220 | max. 600 x 250 | max. 1300 x 450 |
| 3. Elektrischer Anschluss: (Spezialvers. in Klammern): | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz |
| 4. Anschlussleistung: | 650 W | 750 W | 880 W |
| 5. UV-Röhren | 4 x 15 W | 4 x 20 W | 6 x 40 W |
| 6. Warmluftthermostat: (regelbar) | max. 60° | max. 60° | max. 60° |
| 7. Gewicht (ca.): | 18 kg | 24 kg | 40 kg |

| TECHNICAL DATA | TS 25/30 | TS 35/50 | TS 35/100 |
|---|----------------------------------|----------------------------------|-----------------|
| 1. Dimensions (width x height x depth): | 520x200x460 | 760x180x550 | 1370x193x625 |
| 2. Plate size (in mm): | max. 350 x 220 | max. 600 x 250 | max. 1300 x 450 |
| 3. Electric supply: (Special vers. in brackets): | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz (115 V / 60 Hz) | 230 V / 50 Hz |
| 4. Power rating: | 650 W | 750 W | 880 W |
| 5. UV tubes: | 4 x 15 W | 4 x 20 W | 6 x 40 W |
| 6. Warm air thermostat (adjustable): | max. 60° | max. 60° | max. 60° |
| 7. Weight (approx.): | 18 kg | 24 kg | 40 kg |

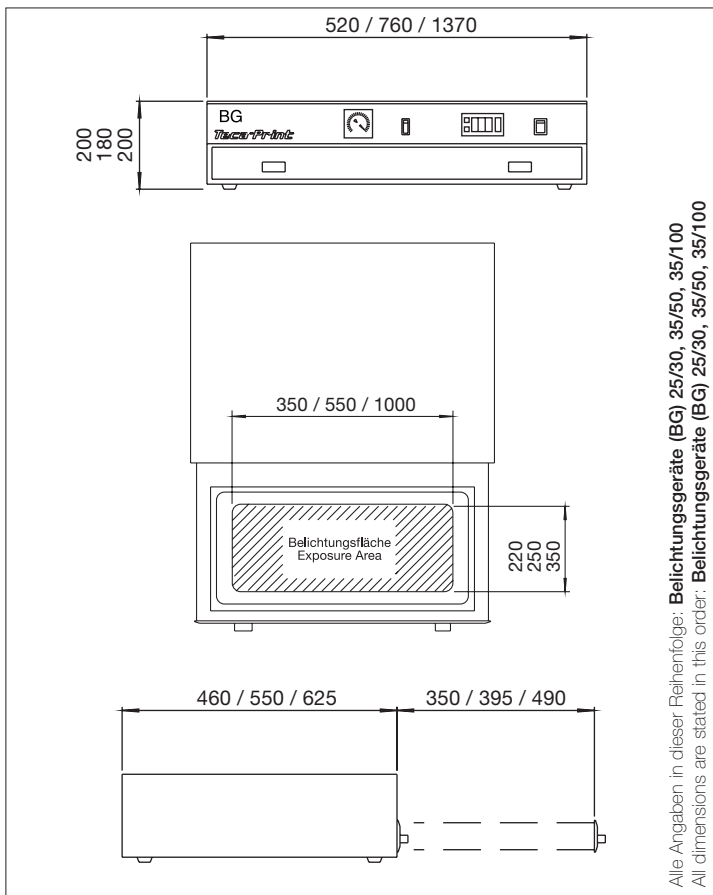

Alle Angaben in dieser Reihenfolge: **Belichtungsgeräte (BG) 25/30, 35/50, 35/100**
All dimensions are stated in this order: **Belichtungsgeräte (BG) 25/30, 35/50, 35/100**

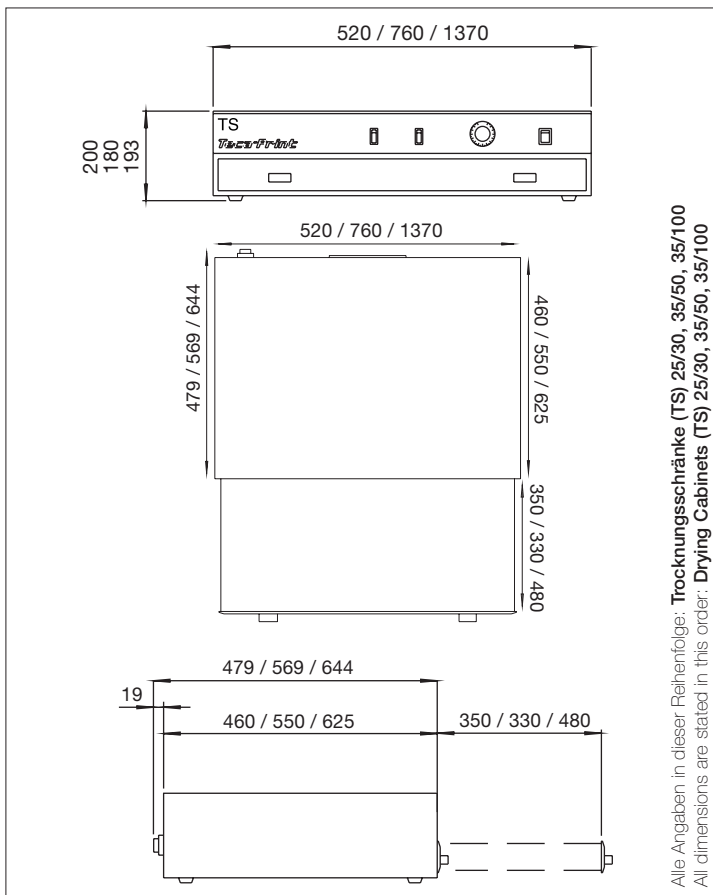

Alle Angaben in dieser Reihenfolge: **Trocknungsschränke (TS) 25/30, 35/50, 35/100**
All dimensions are stated in this order: **Drying Cabinets (TS) 25/30, 35/50, 35/100**

Technische Änderungen vorbehalten.
Alle Massangaben in mm.

We reserve the right to make technical changes
without prior notice. All dimensions in mm.



Teca-Print

Teca-Print AG
Postfach
Bohlstrasse 17
CH-8240 Thayngen

Tel. +41 (0)52 645 2000
Fax +41 (0)52 645 2102
info@teca-print.com
teca-print.com